

HIGH PERFORMANCE TIRE CHANGERS

Two heavy-duty tire changers designed to handle the mounting and demounting of low profile and run-flat tires.


Features TC-660 & TC-980MR:

- ◆ Tilting column and pneumatic locking system
- ◆ Bead seating inflation jets are integrated in the clamping jaws insuring quick and safe inflation
- ◆ Twin clamping cylinders provides more power to hold the most difficult rims
- ◆ Conveniently located and powerful bead breaker
- ◆ No scratching. Machine never contacts rim eliminating accidental damage
- ◆ Large diameter hex mount/demount shaft for extra rigidity
- ◆ Pressure limiter, water separator and oiler are standard



TC-660
Large tire / fully automatic / single arm / tilt back

HANDLES TIRES TO 41" DIAMETER AND RIM WIDTHS TO 16". ASSIST ARM FOR CHANGING STIFF LOW-PROFILE TIRES. TILTING COLUMN AND PNEUMATIC LOCKING SYSTEM.

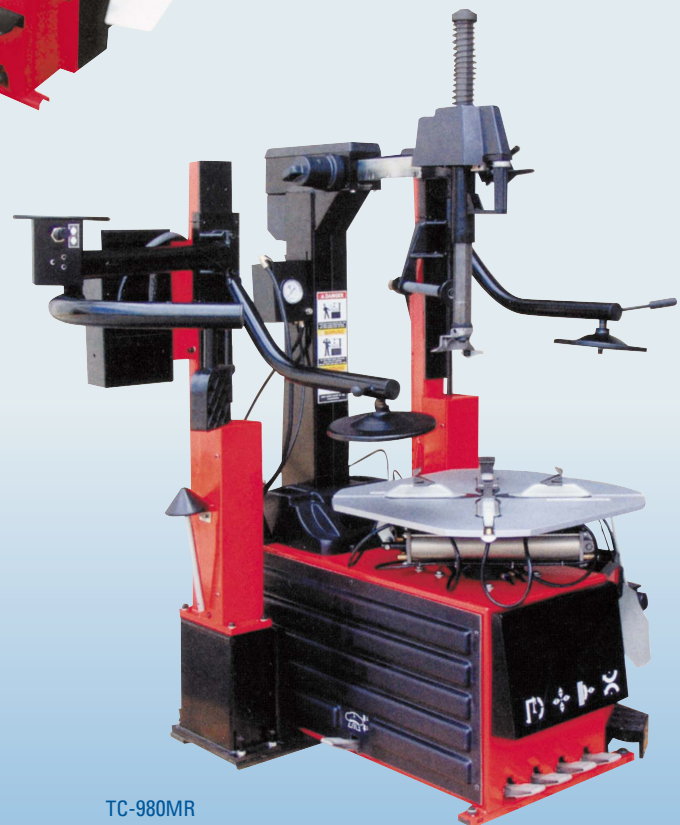

TC-980MR
Large tire / fully automatic / double arm / tilt back

HANDLES TIRES TO 47 1/4" DIAMETER AND RIM WIDTHS TO 15". TWO ASSIST ARMS FOR "HANDS-FREE" CHANGING OF STIFF LOW-PROFILE TIRES.

| SPECIFICATIONS | TC-660 | TC-980MR |
|----------------------|-----------|-----------|
| Max wheel diameter | 41" | 47 1/4" |
| Max wheel width | 3" - 16" | 3" - 15" |
| Rim diameter inside | 12" - 23" | 15" - 28" |
| Rim diameter outside | 10" - 20" | 13" - 24" |
| Working pressure | 8-10 bar | 8-10 bar |
| Power supply | 110 vac | 110 vac |
| Bead breaker | 2500 kg | 2500 kg |